

The Hi Flo Loop System™ Ordering Guide



The patented OPW HiFlo Loop System™ represents the state of the art in Retail Fueling containment technology offering a completely integrated, environmentally secure underground fuel-delivery system. By design, the system employs pre-fabricated and factory-assembled components resulting in dramatically less field labor, lower associated costs, and reduced potential for installation errors. The installed product preserves complete underground access to all piping connections, piping runs, and containment sumps. This unprecedented level of access allows for hassle-free inspections and maintenance without ever having to disrupt the business of the site with excavation. The HiFlo Loop System incorporates field-proven OPW technology to provide the same peace-of-mind that customers have come to expect from the traditional Retail Loop System.

Benefits

- **Compatible with Ovation and Encore High-Speed Dispensers**
- **Configurable for any Master->Satellite setup**
- **Standard on all Loop Sumps, Renewable Fuel (RF) 10 Plus provides best-in-class flow and protection**
- **Hybrid Entry Fitting (HEF) combines the benefits of REF outside the sump with the flexibility of DEB on the inner sump**
- **1.5" or 2" satellite line options**



- Providing a solution to minimize traditional fuel-delivery system problems.
- **The End Result** – An exponentially higher level of environmental protection and lower cost of fuel-delivery system ownership.


Ordering Guide

DSLH(F) — () —				
Dispenser Sump Loop, HiFlo	Line Sizes	Dispenser Style	Ovation Options (As Needed)	Configuration Layout
DSLH = Poly, DPC Fittings DSLHF = Fiberglass, DPC Fittings DSLHN* = Poly, SBC Fittings DSLHFN* = Fiberglass, SBC Fittings *Only available for 2" trunk lines	20 = 2" Trunk 2015 = 2" Trunk, 1.5" Satellite 30 = 3" Trunk 3015 = 3" Trunk, 1.5" Satellite 23 = 2" x 3" Trunk* 32 = 3" x 2" Trunk* XX = No Trunk, 2" Satellite Dispenser XX15 = No Trunk, 1.5" Satellite Dispenser *First number indicates Side A, Second number indicates Side B	1535L = Ovation HS, DEF Left 1535R = Ovation HS, DEF Right 1543 = Ovation HS 1836 = Gilbarco Encore 1836M = Gilbarco Encore Master	D = Dual Master T = With Strainer	See footprint charts


The HiFlo Loop System™ Ordering Guide



Encore Ultra-High Master (1836M)

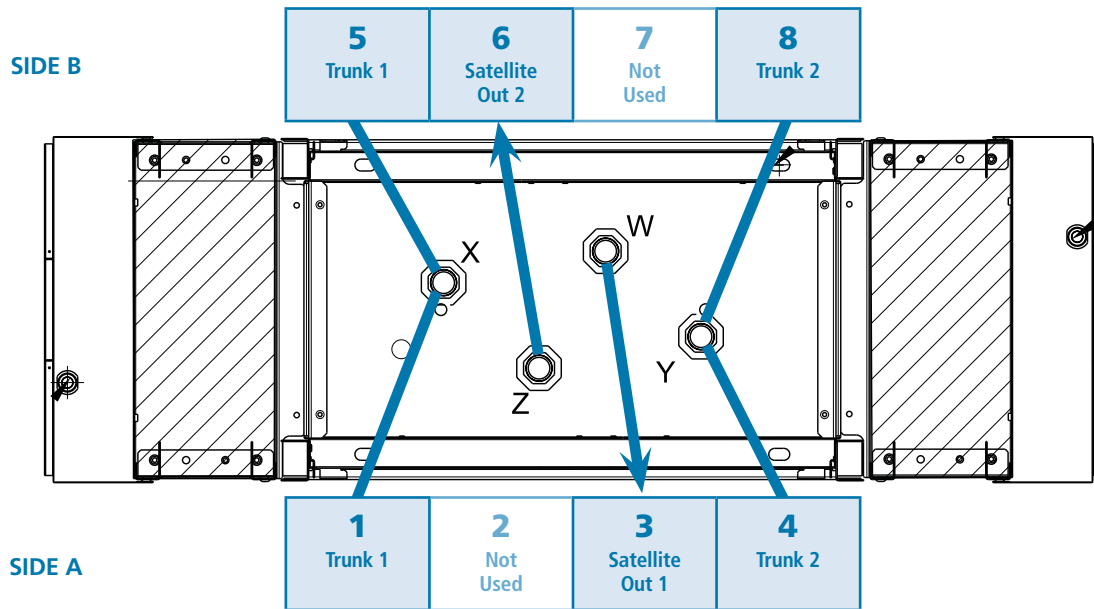

Encore Ultra-High, Single-Sided Master (1836M)

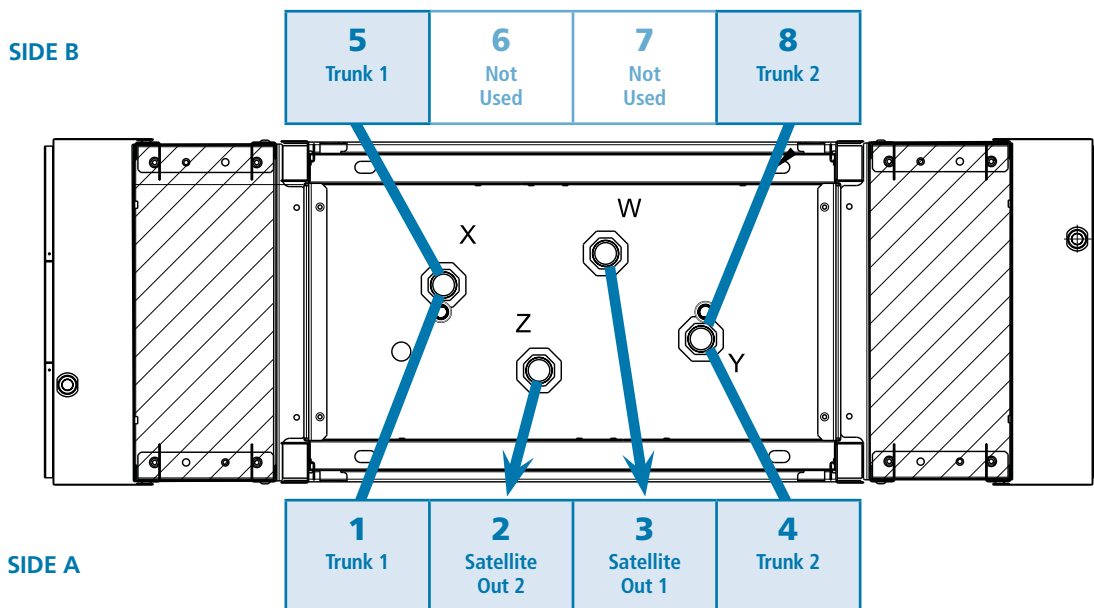


TOP VIEW OF BASES


The HiFlo Loop System™ Ordering Guide



Encore Ultra-High Master/Satellite

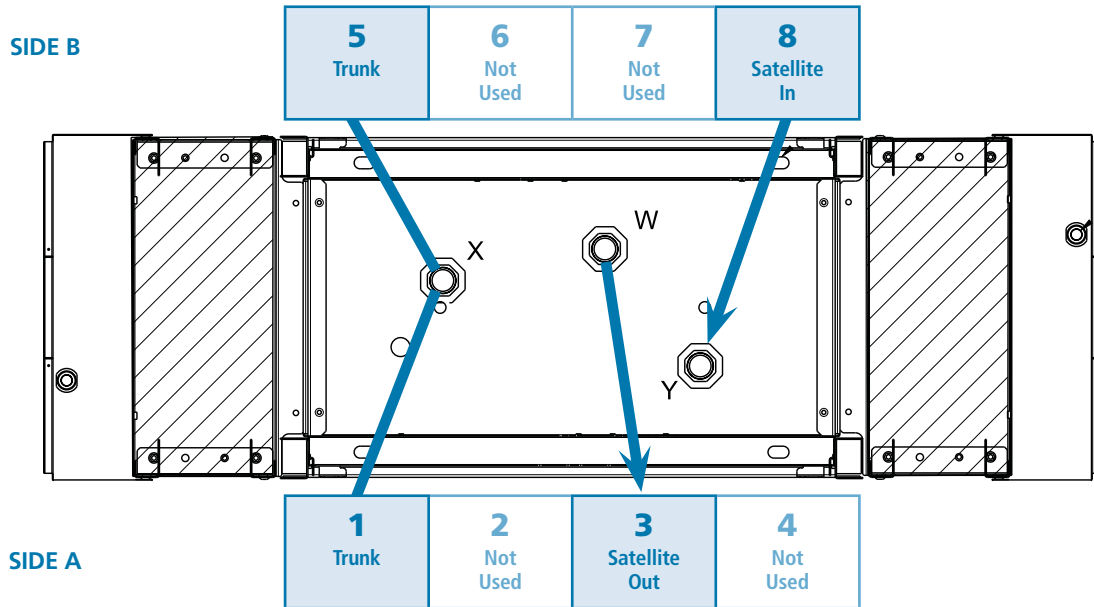

Encore Ultra-High Satellite

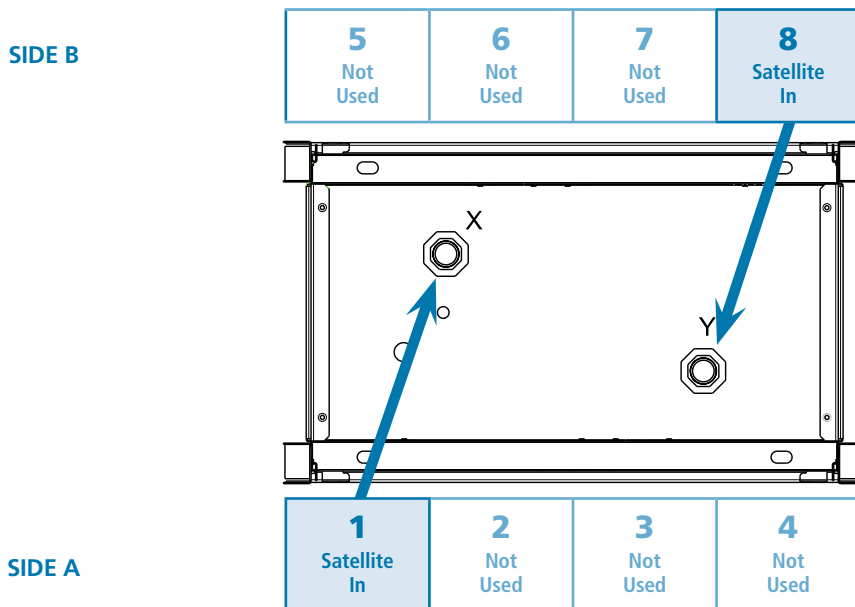


Note: For single-sided satellites, use position "1" on Side A.


TOP VIEW OF BASES

The HiFlo Loop System™ Ordering Guide

Wayne Ovation HS, Single Master

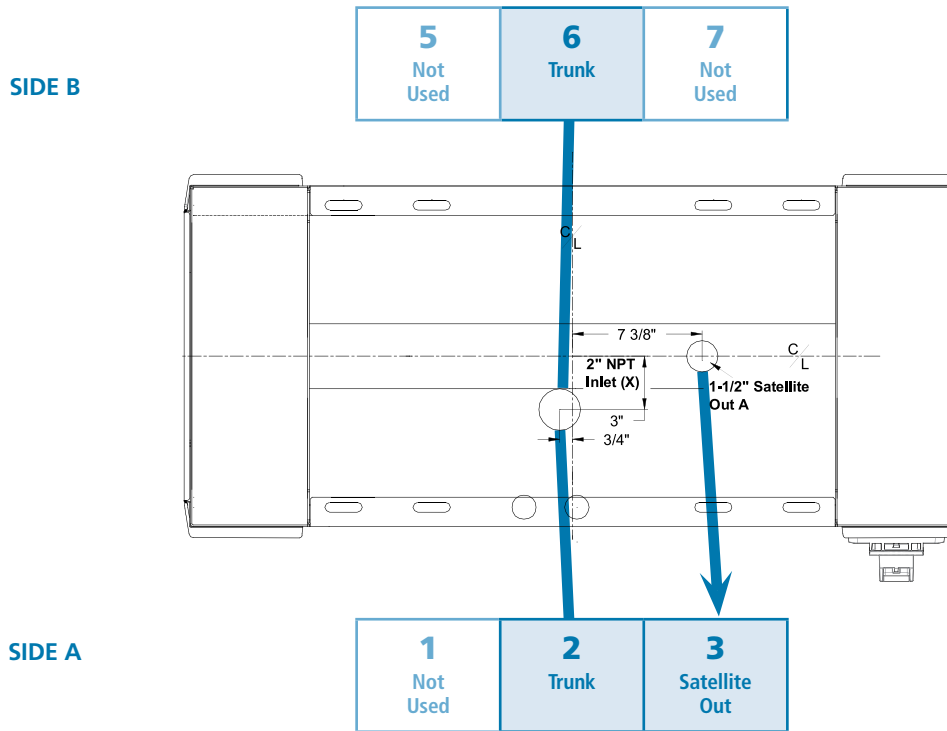


Wayne Ovation HS, Dual-Sided, Master

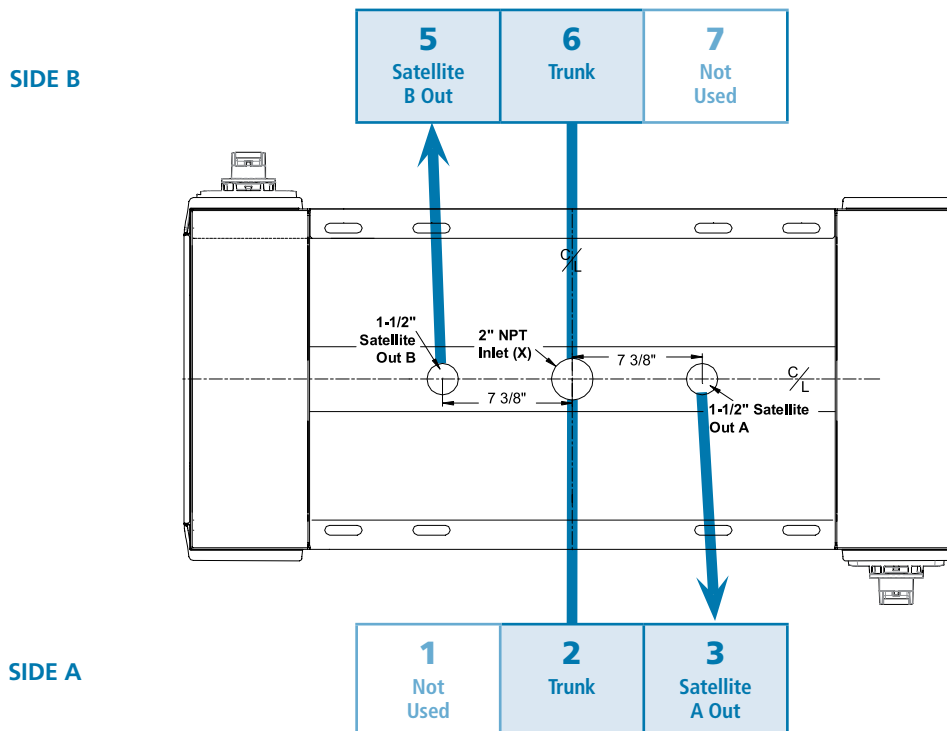


TOP VIEW OF BASES

The HiFlo Loop System™ Ordering Guide

Wayne Ovation HS, Master/Satellite

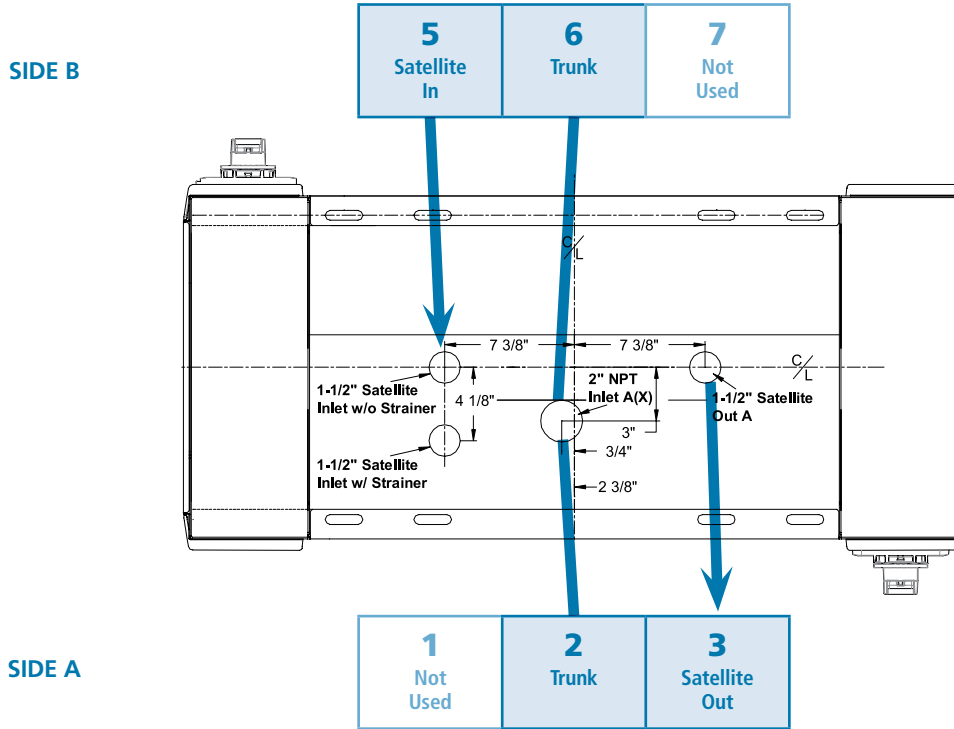

Wayne Ovation HS, Satellite

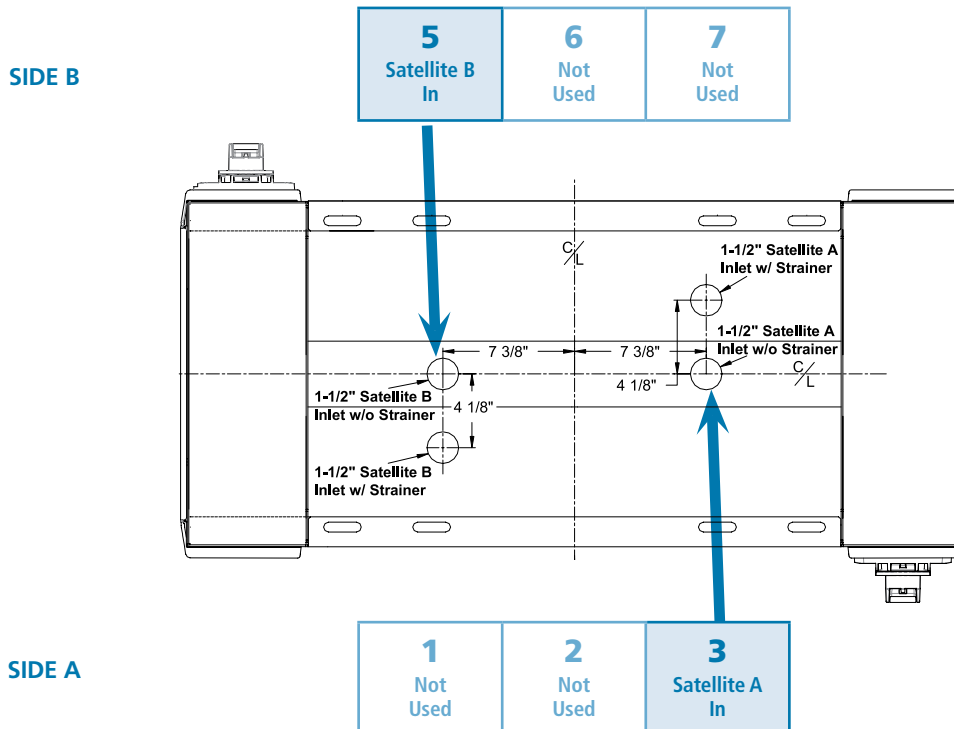

Note: For single-sided satellites, use position "3" on Side A.

TOP VIEW OF BASES